



**LARGE STEEL CRANE OUTRIGGER MATS**

**Four Individual Mats = 4m x 2.2m  
 With a Mighty 8.8m Coverage Area**



**Delivered By Transport and Individually  
 Lifted into Position by Our Crane or onsite forklift**

- Fully Certified
- Fully EC Compliant
- Safe Working Load Per Mat = 200,000kg

**Applications**



- ✓ Crane Outriggers
- ✓ Concrete Pumps
- ✓ MEWPS
- ✓ Scissor Lifts






## LARGE STEEL CRANE OUTRIGGER MATS

### Configuration

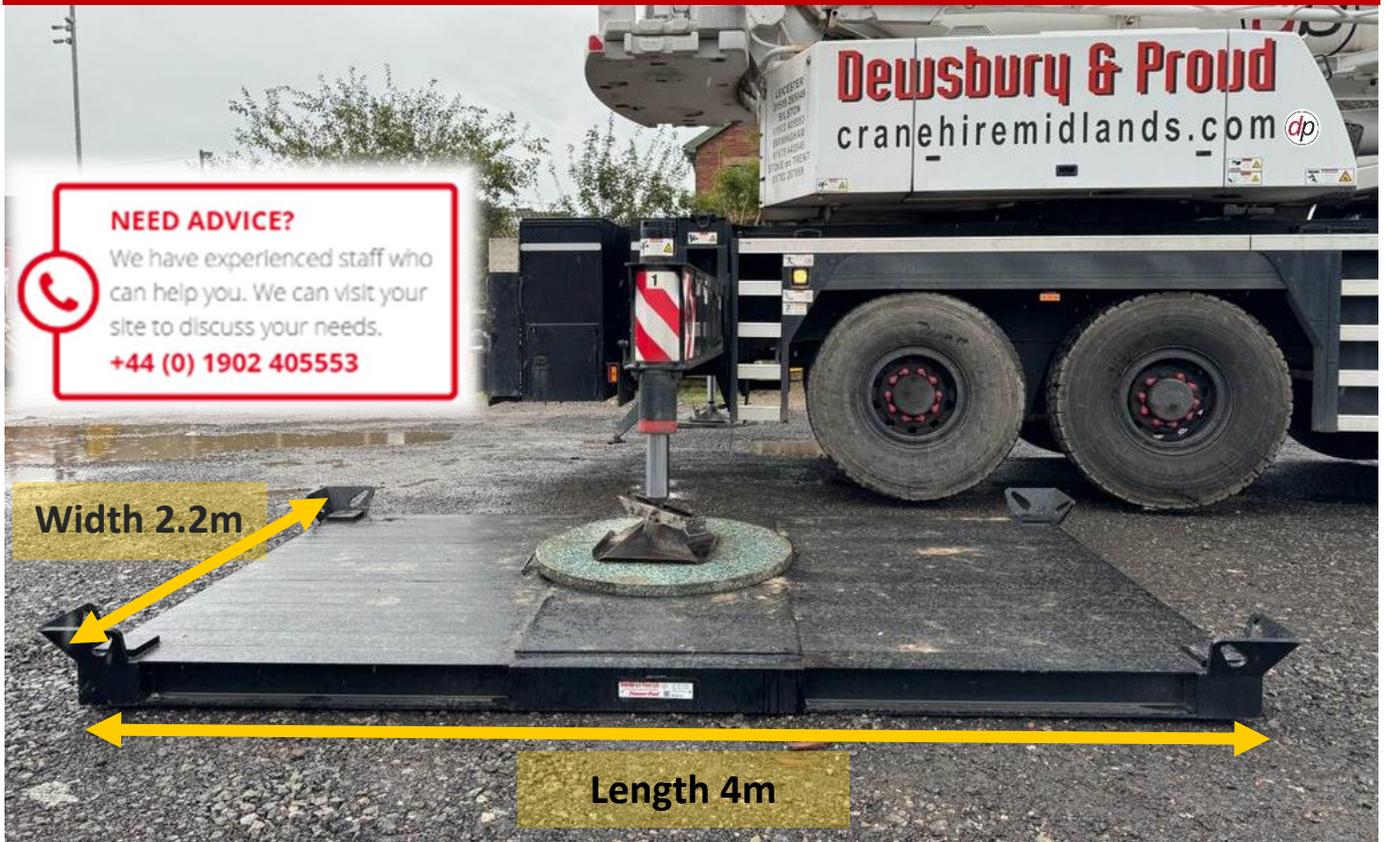


**To be used on firm, level ground.**  
Always ensure that the Power-Pad HD is placed on firm, level ground and is stable before using it to support equipment.



Make sure that the load is centered on the Power-Pad HD.



Do not exceed the rated working load capacity of the Power-Pad HD, as this may cause it to fail and result in equipment damage, injury, or even death.



Do not use Power-Pad HD over voids.

- Fully Certified
- Fully Compliant with European Machinery Directive
- Safe Working Load Per Mat = 200,000kg
- Length 4m
- Width 2.2m
- Thickness 172mm
- Max Individual mat weight = 2,275kg

