



## 1.8m x 1.8m MULTI MAT CRANE OUTRIGGER SYSTEM

**Twenty Individual Mats = 0.6m x 1.8m  
With a 3.24m Coverage Area**



**Delivered By Transport and Individually  
Lifted into Position by Two people or onsite forklift**

- Fully Certified
- 20 individual mats per set
- Length 1.8m
- Width 0.6m
- Thickness 50mm
- Max Individual mat weight = 50kg
- Max Point Load = 140,000kg

### Applications

- ✓ Crane Outriggers
- ✓ Concrete Pumps
- ✓ MEWPS
- ✓ Scissor Lifts





# MULTI MAT SYSTEM

## CONFIGURATION OPTIONS

1800mm

ORIGINAL  
MULTI MAT




2.16m<sup>2</sup> Configuration

Requires:

IP-57710 x 2

IP-57685 /IP-57673  
(Optional)



3.24m<sup>2</sup> Configuration

Requires:

IP-57710 x 5

IP-57685 /IP-57673  
(Optional)



The Multi Mat system has been tested and approved by Lloyds British.


### NEED ADVICE?

We have experienced staff who can help you. We can visit your site to discuss your needs.

+44 (0) 1902 405553


## MULTI MAT SET-UP

### STAGE 1




Position the first level of Multi Mat system

### STAGE 2

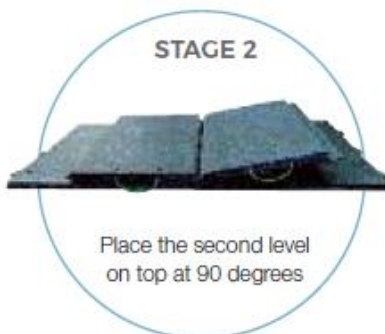

Place the second level on top at 90 degrees

### STAGE 3

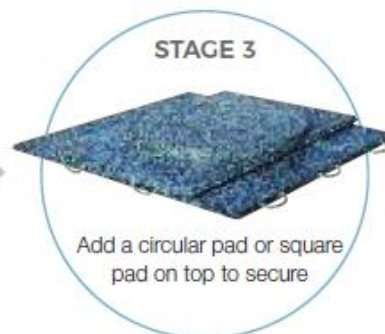

Add a circular pad or square pad on top to secure